


Pewag ERZBERG "ED" Heavy Equipment Chains

Pewag *Erzberg* "ED" with Wear Bars
made with - **TITAN Grip®** - alloy steel

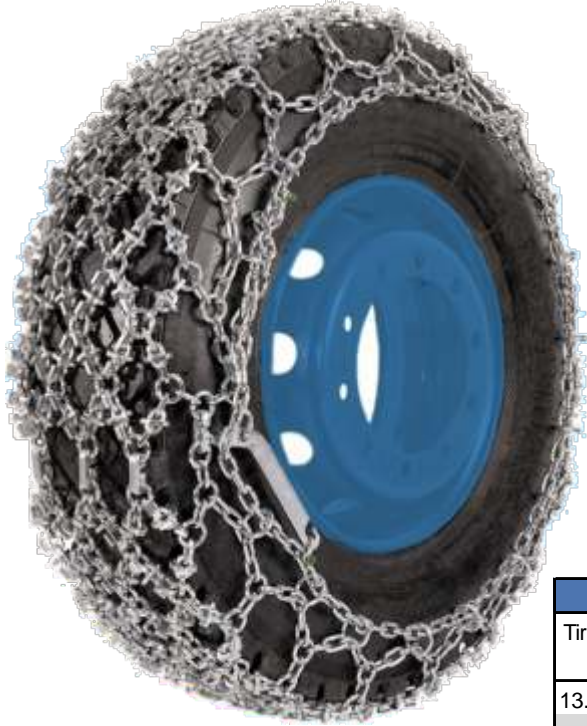

- Heavy equipment tire chains are designed for maximum traction in rugged - commercial applications
- Manufactured using Pewag superior **TITAN Grip®** alloy steel with welded wear bars for extra traction and durability
- Double diamond net pattern design delivers maximum lateral and forward traction
- Erzberg "ED" tire chains are suitable for on and off road use and are highly recommended for snow removal or any heavy duty application where continuous use of tire chain is required
- Replacement parts available at your local retailer

Erzberg "ED" chains are available in sizes up to 51" wheels. Sizes not shown can be special ordered.

Please call for more information on these special order sizes.

Pewag Erzberg "ED" Heavy Equipment Chains

Tire Size	Stock Number	Weight Per Pair	Stock Number	Weight Per Pair	Stock Number	Weight Per Pair
	8.2mm		10mm		12mm	
13.00-24	ERE130024-8	405 lbs	---	---	---	---
14.00-24	---	---	ERE140024-10	595 lbs	---	---
17.5-25	---	---	ERE17525-10	659 lbs	---	---
18.00-25	---	---	ERE180025-10	855 lbs	---	---
20.5-25	---	---	ERE20525-10	775 lbs	ERE20525-12	990 lbs
23.5-25	---	---	ERE23525-10	972 lbs	ERE23525-12	1,091 lbs
26.5-25	---	---	ERE26525-10	1,047 lbs	ERE26525-12	1,240 lbs
29.5-25	---	---	ERE29525-10	1,365 lbs	ERE26525-12	1,689 lbs





Pewag Erzberg "Extension Feld" Chains

Pewag Erzberg "Extension Felds" with Wear Bars
Made in 8.2mm, 10mm, and 12mm



•For more information see: **PAGE 31**

•For Erzberg & Universal spare parts see: **PAGE 46-47**

- Pewag Erzberg chains are designed to fit up to L3 tires (that have NOT been capped). For capped L4 and L5 tires, Pewag makes "Extension Felds" which can be easily added to the chains to increase the length of the chain for these types of tires.
- The use of "Extension Felds" insures the best possible fit on larger OTR tires and should be anticipated when ordering any tire chains for use on an OTR tire.

Pewag Universal & Erzberg Fitting / Sizing Information



Goodyear
20.5R25
GP-2B G3

Dia: 58.1" = Cir: 182.53"
x Width: 20.9" = 3815 sq in.



Goodyear
20.5R25
RT-5C L5

Dia: 63.8" = Cir: 200.4"
x Width: 22.7" = 4549 sq in.

Today's equipment tires can vary greatly in physical size making it important to know your tire BRAND, MODEL, and the E G or L number when ordering equipment chains.

The Goodyear OTR tires shown to the left are a graphic example of this variation in physical size - Both are cataloged as 20.5R25 tires - yet there is a 17% difference in the physical size of the tires when fitting a tire chain such as the Pewag Universal & Erzberg chains. There is a 5.7" difference in the diameter of the 2 tires which directly effects the length of the chain needed to connect around the tire by 17.9".

How is this calculated?

Diameters are translated into circumference by multiplying the diameter x 3.1416 x the width = tread area to be covered by the tire chain. In the example to the left, this calculation yields results of 3815 vs 4549 sq inches, a 17% variation.

Pewag Universal & Erzberg Chains are designed to fit up to L3 tires - (that have NOT been capped). For capped L4 tires AND L5 tires - Pewag makes "Extension Felds " which can easily be added to the chains to increase the length of the chain for these type tires. The use of extension felds insures the best possible fit on the larger OTR tires and should be anticipated when ordering any tire chains for use on OTR tires.